


A Guide to Silane Solutions

The Basics of Silane Chemistry

The Basics of Silane Chemistry

Silicon is in the same family of elements as carbon in the periodic table. In their most stable state, silicon and carbon will both conveniently bond to four other atoms; but silicon-based chemicals exhibit significant physical and chemical differences compared to analogous carbon-based chemicals. Silicon is more electropositive than carbon, does not form stable double bonds, and is capable of very special and useful chemical reactions. Silicon-based chemicals include several types of monomeric and polymeric materials.

Figure 1. Carbon vs. silicon chemistry.

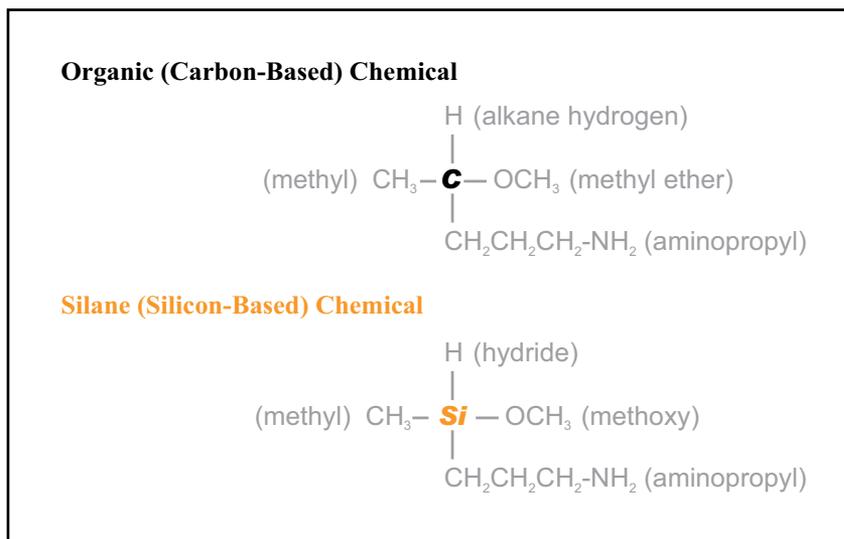

Typical Silane Applications

Coupling Agent: Organofunctional alkoxysilanes are used to couple organic polymers to inorganic materials. Typical of this application are reinforcements, such as fiberglass and mineral fillers, incorporated into plastics and rubbers. They are used with both thermoset and thermoplastic systems. Mineral fillers, such as silica, talc, mica, wollastonite, clay and others, are either pre-treated with silane or treated *in situ* during the compounding process. By applying an organofunctional silane to the hydrophilic, non-organoreactive filler, the surfaces are converted to reactive and organophilic. Fiberglass applications include auto bodies, boats, shower stalls, printed circuit boards, satellite dishes, plastic pipes and vessels, and many others. Mineral-filled systems include reinforced polypropylene, silica-filled molding compounds, silicon-carbide grinding wheels, aggregate-filled polymer concrete, sand-filled foundry resins and clay-filled EPDM wire and cable. Also included are clay- and silica-filled rubber for automobile tires, shoe soles, mechanical goods and many other applications.

Adhesion Promoter: Silane coupling agents are effective adhesion promoters when used as integral additives or primers for paints, inks, coatings, adhesives and sealants. As integral additives, they must migrate to the interface between the adhered product and the substrate to be effective. As a primer, the silane coupling agent is applied to the inorganic substrate before the product to be adhered is applied. In this case, the silane is in the optimum position (in the interphase region), where it can be most effective as an adhesion promoter. By using the right silane coupling agent, a poorly adhering paint, ink, coating, adhesive or sealant can be converted to a material that often will maintain adhesion even if subjected to severe environmental conditions.

Hydrophobing and Dispersing Agent: Alkoxysilanes with hydrophobic organic groups attached to silicon will impart that same hydrophobic character to a hydrophilic inorganic surface. They are used as durable hydrophobing agents in construction, bridge and deck applications. They are also used to hydrophobe inorganic powders to make them free-flowing and dispersible in organic polymers and liquids.

Crosslinking Agent: Organofunctional alkoxysilanes can react with organic polymers to attach the trialkoxysilyl group onto the polymer backbone. The silane is

then available to react with moisture to crosslink the silane into a stable, three-dimensional siloxane structure. Such a mechanism can be used to crosslink plastics, especially polyethylene, and other organic resins, such as acrylics and urethanes, to impart durability, water resistance and heat resistance to paints, coatings and adhesives.

Moisture Scavenger: The three alkoxy groups on silanes will hydrolyze in the presence of moisture to convert water molecules to alcohol molecules. Organotrialkoxysilanes are often used in sealants and other moisture-sensitive formulations as water scavengers.

Polypropylene Catalyst “Donor”: Organoalkoxysilanes are added to Ziegler-Natta catalyzed polymerization of propylene to control the stereochemistry of the resultant polypropylene. The donors are usually mono- or di-organo silanes with corresponding tri- or di-alkoxy substitution on silicon. By using specific organosilanes, the tacticity (and hence the properties) of the polypropylene is controlled.

Silicate Stabilizer: A silicate derivative of a phosphonate-functional trialkoxysilane functions as a silicate stabilizer to prevent agglomeration and precipitation of silicates during use. The predominant application is in engine coolant formulations to stabilize the silicate corrosion inhibitors.

Benefits of Silanes

Below is a listing of some industries that can utilize XIAMETER® brand silanes and the corresponding benefits.

Industries	Benefit(s)
Fiberglass and Composites	Improved: <ul style="list-style-type: none"> • Mechanical strength of the composites • Electrical properties • Resistance to moisture attack at the interface • Wet-out of the glass fiber • Fiber strand integrity, protection and handling • Resistance to hot solder during fabrication • Performance in cycling tests from hot to cold extremes
Mineral and Filler Treatment	Improved: <ul style="list-style-type: none"> • Adhesion between the mineral and the polymer • Wet-out of the mineral by the polymer • Dispersion of the mineral in the polymer • Electrical properties • Mechanical properties Reduced viscosity of the filler/polymer mix
Paints, Inks and Coatings	Improved: <ul style="list-style-type: none"> • Abrasion resistance • Adhesion • Flow • Crosslinking to improve thermal stability and durability • Pigment and filler dispersion • UV resistance • Water and chemical resistance
Plastics and Rubber	<ul style="list-style-type: none"> • Coupling and dispersing agents for fillers in rubber and plastics formulations • Polymerization modifiers in the synthesis of polypropylene • Crosslinking agents for polyethylene homopolymers and copolymers • Inorganic filler in place of carbon black in the reinforcement of rubber
Adhesives and Sealants	Improved: <ul style="list-style-type: none"> • Initial adhesion • Adhesive bond with longer life • Temperature resistance • Chemical resistance
Water Repellents and Surface Protection	Improved: <ul style="list-style-type: none"> • Water repellency • Long-term durability • UV stability • Depth of penetration • Water vapor permeability • Dilution capability and stability • Appearance

Product Information

A complete list of XIAMETER® brand silanes is available at xiameter.com.

In addition, Dow Corning Corporation also offers a wide variety of *Dow Corning*® brand specialty silicone material and service options as well as other silicon-based materials available to help you keep your innovative edge in the marketplace. Visit dowcorning.com to learn more about the many additional silicone and silicon-based options available to you from Dow Corning.

LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow Corning's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

DOW CORNING SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.

DOW CORNING DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Dow Corning is a registered trademark of Dow Corning Corporation.

XIAMETER is a registered trademark of Dow Corning Corporation.

©2009 Dow Corning Corporation. All rights reserved.

Printed in USA

AGP9791

Form No. 95-718-01