




RenPaste™

seamless modelling pastes

OBO-Werke are manufacturer and
supplier for RenPaste™
seamless modelling pastes in Europe



RenPaste™ seamless modelling pastes – the best quality for different requirements

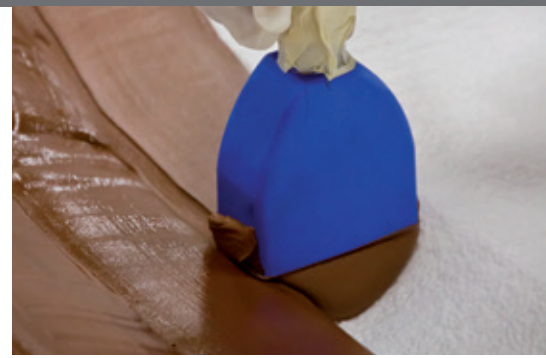







RenPaste™ seamless modelling pastes (applied by machine)

standard types and packing units

technical data

Measured average values, given for information purposes only.

Type	RenPaste™ Resin XD 4601-1	RenPaste™ Hardener XD 4601-1	RenPaste™ Resin SV 4503-1	Ren® Hardener HV 4503-1	RenPaste™ Resin 4666	Ren® Hardener 4666
Colour	light brown	whitish	brown	white	dark grey	white
Applications	• styling model		• styling model • master model • moulds		• styling model • master model • moulds	
Mix ratio	100 : 100		100 : 100		100 : 100	
Minimum cure schedule at 23°C	machinable after 24 – 36 hours		machinable after 1 – 2 days		machinable after 1 day	
Density approx. g/cm ³	0,52 - 0,57		0,70 - 0,80		0,90 - 1,00	
Hardness (ISO 868) Shore-D	40 - 45		55 - 60		60 - 65	
Coefficient of thermal expansion after 3 days at room temperature (ISO 11359) 10 ⁻⁶ · K ⁻¹	95 - 105		100 - 105		75 - 80	
Deflection temperature (ISO 75) °C	45 - 50		45 - 55		50 - 80	
Storage temperature °C	+5 up to +25	+5 up to +25	+5 up to +25	+5 up to +25	+2 up to +40	+2 up to +40
Packing units Article	 20 kg SP V 0809308	 20 kg SP V 0809108	 32 kg SP V 0807508	 32 kg SP V 0564608	 40 kg SP V 1593708	 40 kg SP V 1594208
Packing units Article	75 kg SP V 0809408	75 kg SP V 0809208	120 kg SP V 0807608	120 kg SP V 0807208	150 kg SP V 1593908	150 kg SP V 1594308

The technical data relating to the material and its processing has been compiled carefully and is correct to the best of our knowledge.

The information cannot, however, be taken to be legally binding nor as any commitment that the material has certain properties or is suited for any particular purpose.

Please also note our technical data sheets.

You will find this on our homepage www.obo-werke.de.







RenPaste™ seamless modelling pastes (applied by hand)

standard types and packing units

technical data

Measured average values, given for information purposes only.

Type	RenPaste™ Resin SV 427-2	Ren® Hardener HV 427-1	RenPaste™ Resin SV 36	Ren® Hardener HV 36
Colour	brown	dark brown	white	brown
Properties/Applications	<ul style="list-style-type: none"> • room temperature curing • general alteration or repair of models and patterns 		<ul style="list-style-type: none"> • no pin-holes • easy manual application • layer thickness up to 40 mm • light models • patterns and repairs 	
Mix ratio	100 : 100		100 : 100	
Pot life (1 liter, 25°C) min	40		60	
Density approx. g/cm³	0,6		0,5	
Maximum castable layer thickness mm	20		40	
Deflection temperature (ISO 75) °C	55 - 60		55 - 60	
Storage temperature °C	+2 up to + 40	+2 up to + 40	+2 up to + 40	+2 up to + 40
Packing units Article	 10 kg LR V 0830608	 10 kg LR V 0828208	 10 kg SP V 0570208	 10 kg SP V 0564508

Properties

RenPaste™ – seamless modelling pastes based on Epoxy

- 2 components extrudable paste
- Hand or machine application
- Applied with a metering / mixing machine on substrate
- CNC machined from CAD data after curing of the paste
- Once milled, no joints or voids are visible (seamless material)

OBO-Werke your supplier for RenPaste™ seamless modelling pastes in Europe

OBO-Werke GmbH

Office:

Am Bahnhof 5
31655 Stadthagen
Germany

phone ++49/5721/7801-0

fax ++49/5721/77855

Business hours:

Monday until Thursday

08:00 a.m. until 04:00 p.m.

Friday 08:00 a.m. until 02:00 p.m.

email: info@obo-werke.de

www.obo-werke.de

OBO-Werke GmbH manufacture RenShape® boards and RenPaste™ seamless modelling paste under license from Huntsman Advanced Materials (Switzerland) GmbH.

Ren® is either property of or licensed to Huntsman Corporation or an affiliate thereof in one or more, but not all, countries.

RenPaste™ indicates a trademark of Huntsman Corporation or an affiliate thereof.

Pictures on the cover page, right picture bar: www.fotolia.com, product pictures: OBO, reverse side: OBO, all further pictures with kind permission of Huntsman Corporation.

edition: June 2017

Pick up address / warehouse:

Werk II – Industriestraße 6
31655 Stadthagen
Germany

phone ++49/5721/9952718

fax ++49/5721/9952719

Business hours:

Monday until Friday

07:00 a.m. until 01:30 p.m.

Your sales distributor:



Further Information

You can obtain the following information by fax or email:

- technical safety data sheets
- technical data sheets

